





SEAMLESS LED POSTER

Indoor & Outdoor Digital Signage Solution

GOB Technical Support | HDMI Auto Splicing | Impactful Design

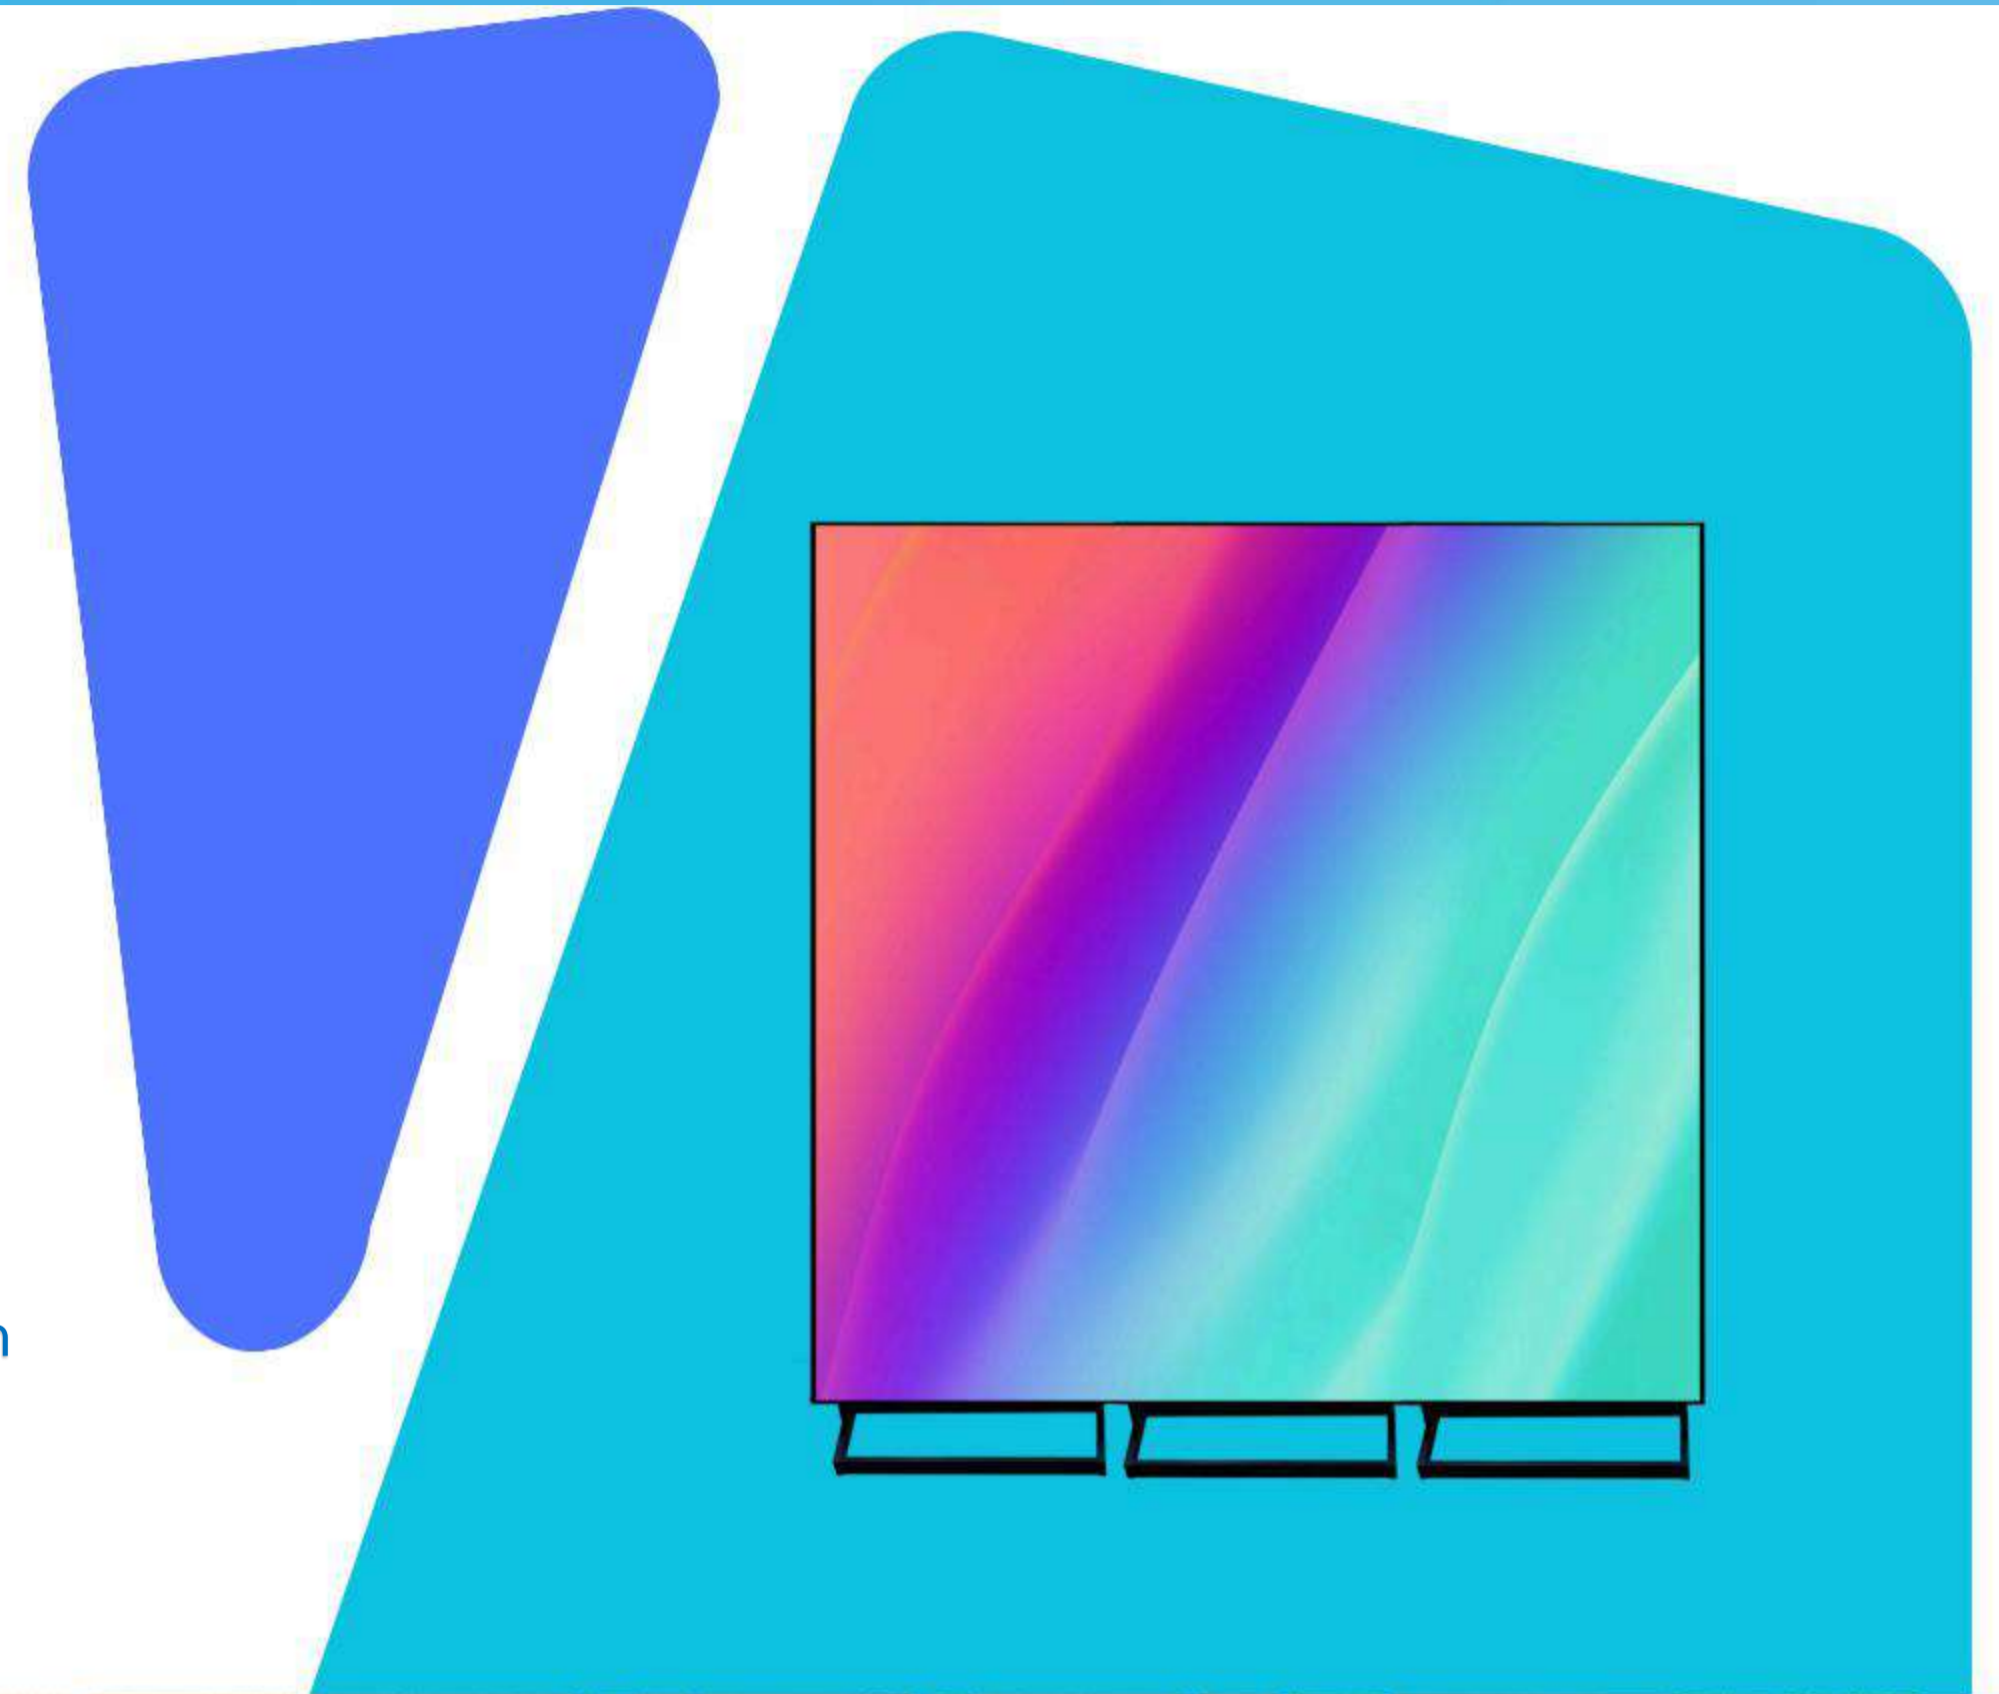

SEAMLESS·ONE SCREEN, INFINITE POSSIBILITIES

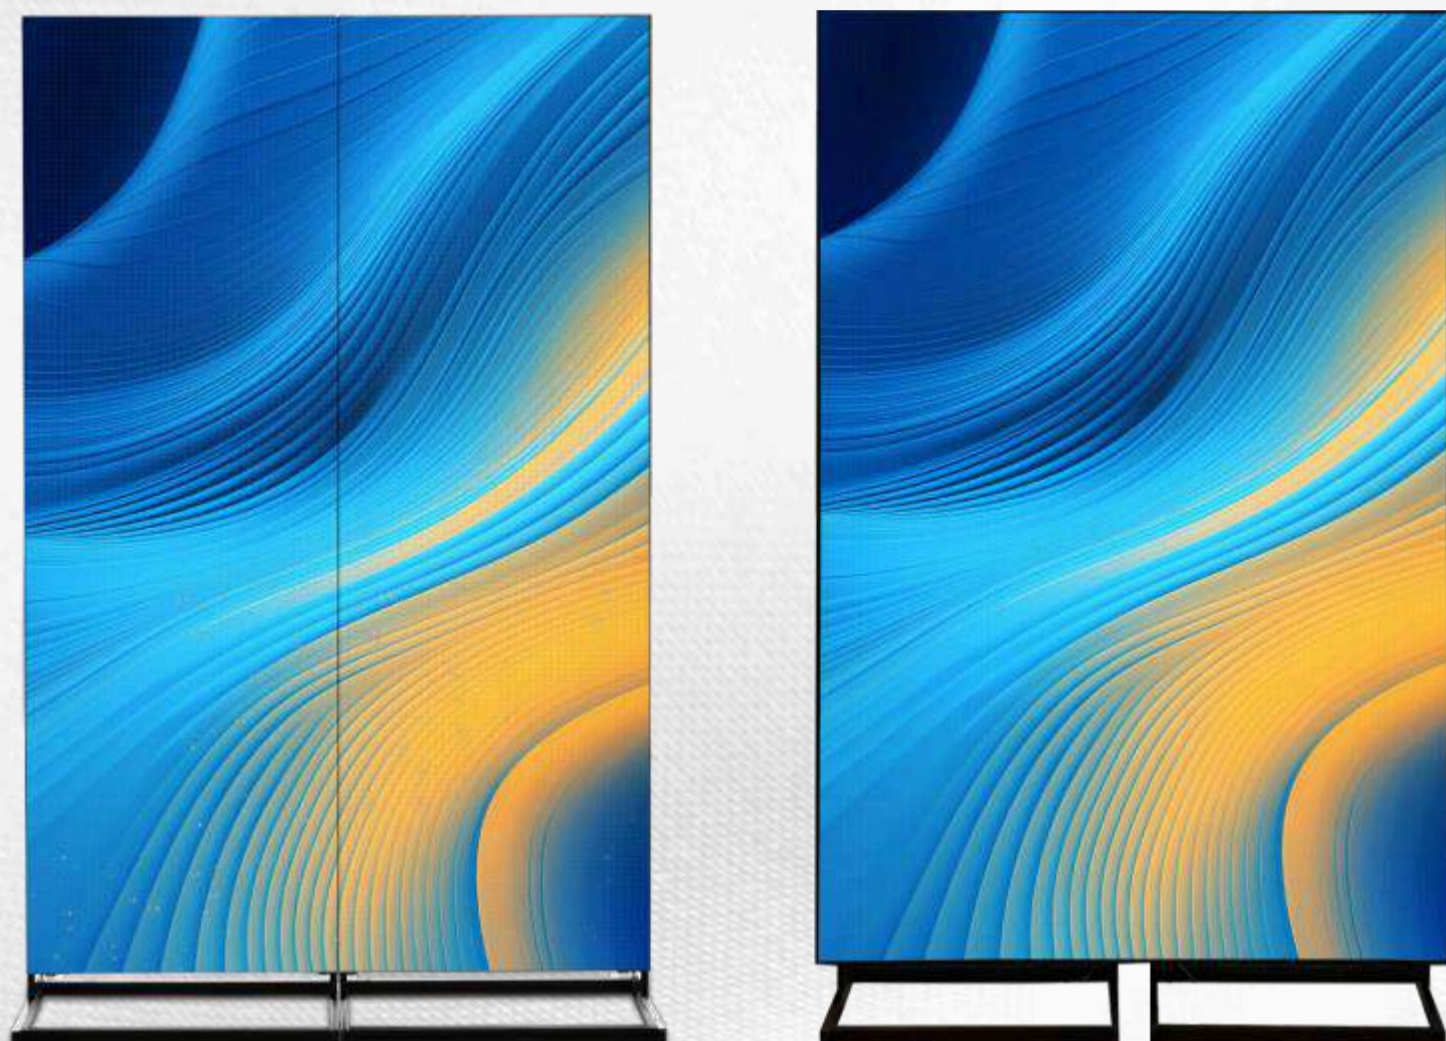

Seamed

VS

Seamless

Ethernet Cables

Visible Seams

Larger and Bulkier

HDMI Auto Splicing


Completely Seamless


Compact and Portable



Connect multiple units via HDMI to create a larger display.

Compared to traditional network cables, HDMI offers advantages such as high bandwidth, high definition, plug-and-play functionality, audio support, and broad device compatibility.

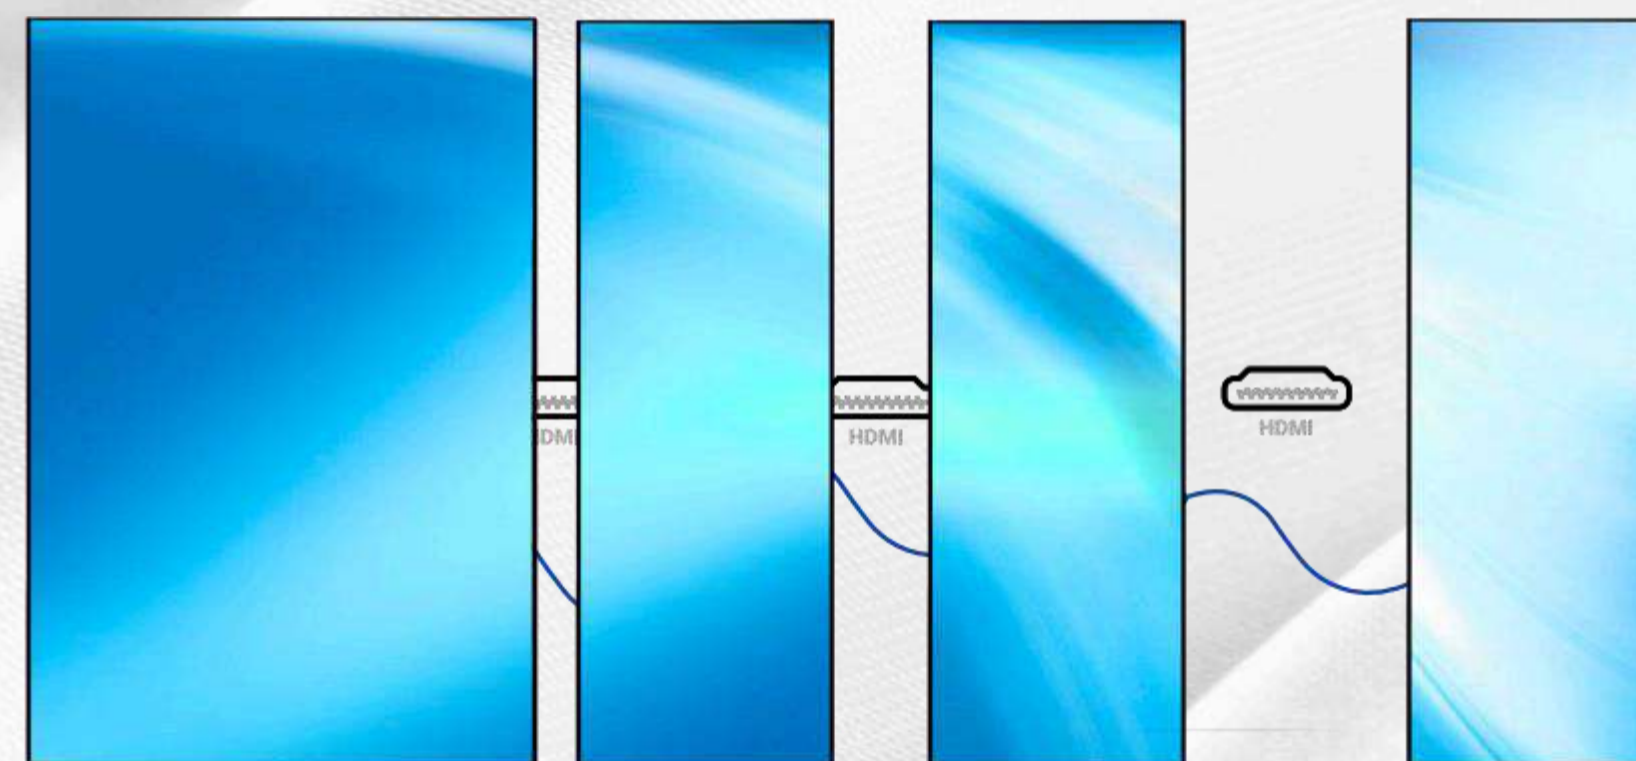

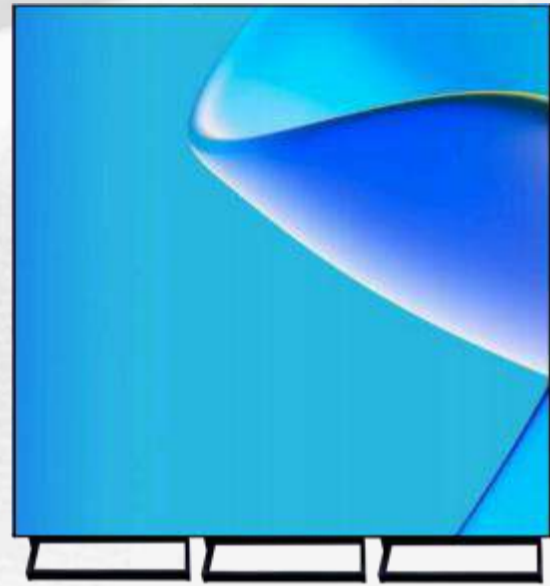

3 units


Suitable for:
Exhibition halls
Conference rooms

....

5 units

Suitable for:
Shopping malls
Event stages


....

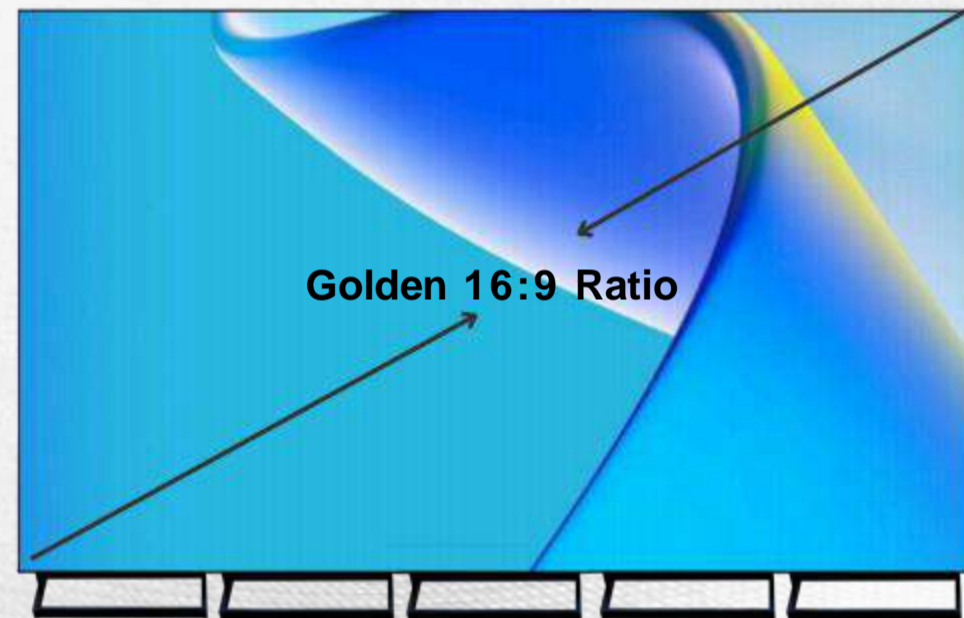

10 units


Suitable for:
Concerts
Control centers

....

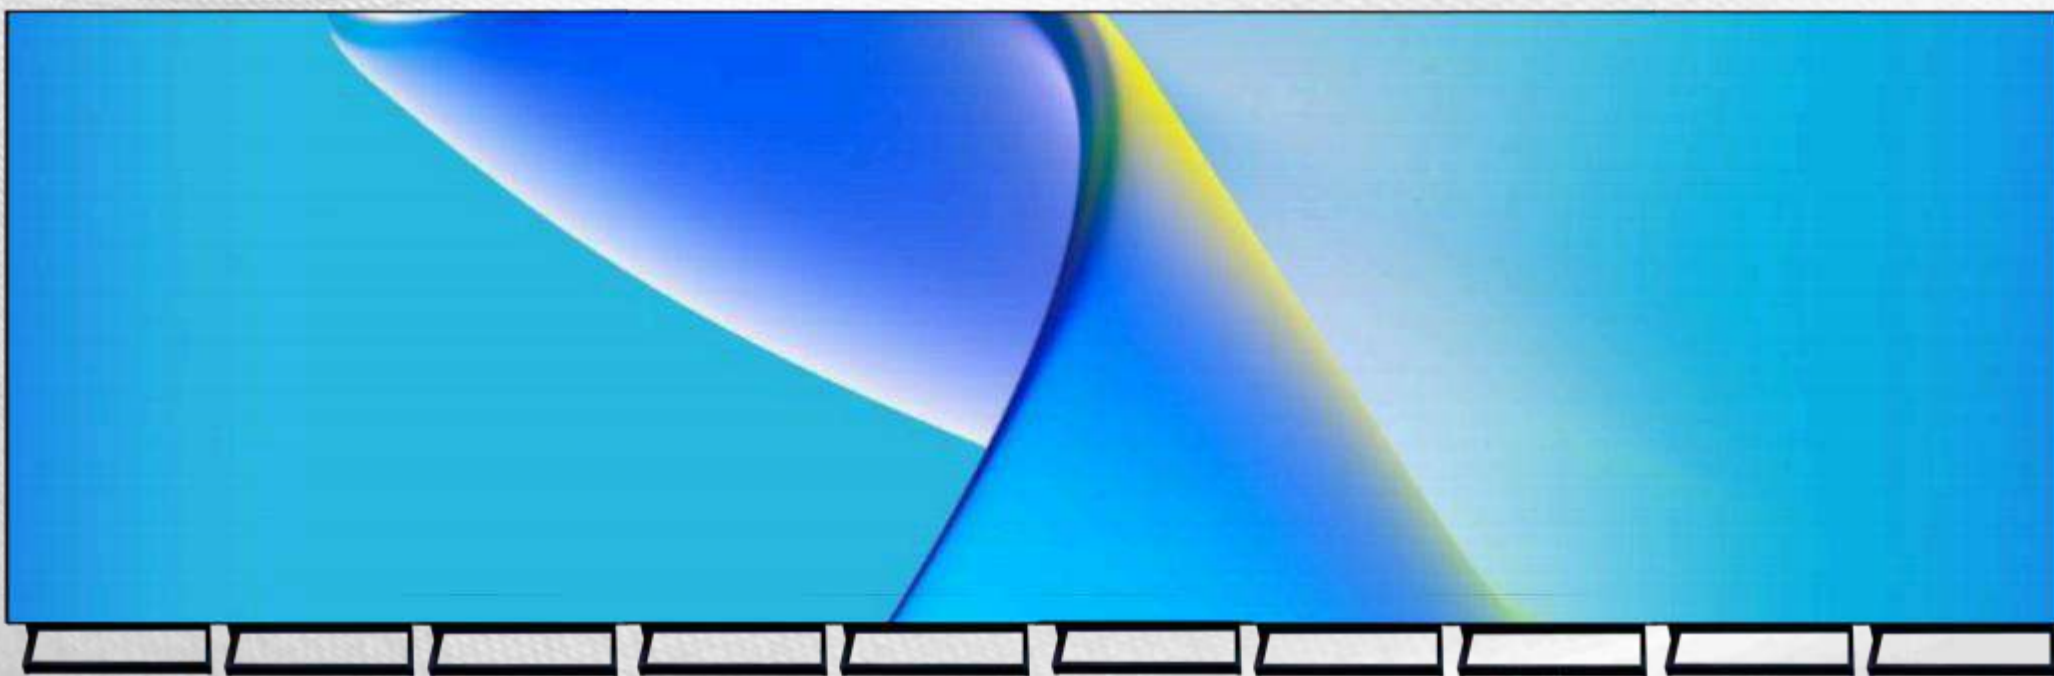

Outdoor

Indoor

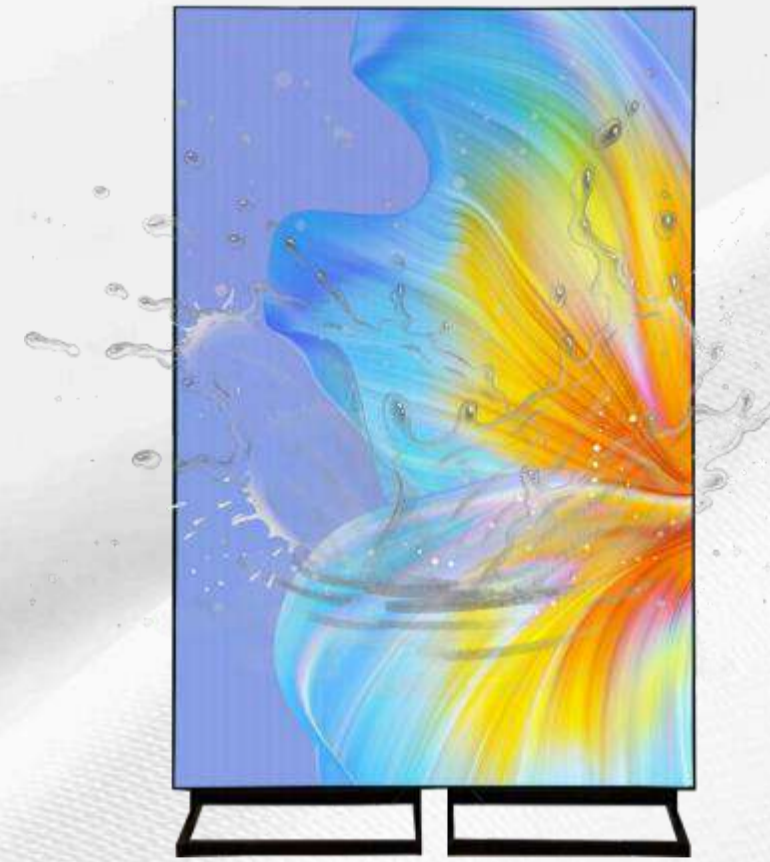

Waterproof & Outdoor-Ready

Outdoor seamless LED poster are built for outdoor conditions – rain, dust, and sunlight included.



GOB Surface Protection



HDMI/Auto Splicing



Super High Refresh Rate ≥ 7680 HZ



Small Size Large Spacing



High-Definition Screen



Customization Available

Customization Available



✦ Custom sizes available to meet your project specifications.

Flight Case



✦ Side-opening design for quick access and easy single-person installation.

Outdoor Seamless LED Poster Specification

Model Type	P2.5
Pixel pitch	2.5mm
Destiny	160,000 dots /SQM
LED Type	GOB
Pixel type(R / G / B)	1R1G1B (3 in 1)
Module size	320*160mm
Module Resolution	128*64pixel
Screen Size (H*W)	640x1920 mm
Feet Size	2.10x6.3 ft
Screen Resolution	256x768 pixel
Frame Size	2018mm(H)*640mm(W)*45mm(T)
Case Material	Aluminum
Weight	50kg/unit
Drive mode	1/16 Scan
Viewing Distance	> 2.5m
Brightness	5000 cd/m ²
Viewing Angle	140°/140°
Refresh rate	3840/7680HZ Optional
Input voltage	AC 100-230 V
Maximum Power Consumption	800W
Average Power Consumption	250W
Control method:	Syn / Asyn (WIFI/ USB/ LAN/ HDMI)
Splicing method	HDMI automatic splicing
Temperature Operating (°C)	-40°C ~ +75°C
Working Humidity	10%-90%
IP Rating	IP65
Package	Flight case (side opening)
Application	Outdoor
Certificate	CE / ROHS / FCC

Indoor Seamless LED Poster Specification

Model Type	P1.86	P2	P2.5
Pixel pitch	1.86mm	2mm	2.5mm
Destiny	288,906dots /SQM	250,000 dots /SQM	160,000 dots/SQM
LED Type	GOB	GOB	GOB
Pixel type(R / G / B)	1R1G1B (3-in-1)	1R1G1B (3 in 1)	1R1G1B (3-in-1)
Module size	320x160 mm	320x160 mm	320x160 mm
Module Resolution	172x86pixel	160*80pixel	128x64pixel
Sreen Size (H*W)	640x1920 mm	640*1920mm	640x1920 mm
Feet Size	2.10x6.3 ft	2.10x6.3 ft	2.10x6.3 ft
Screen Resolution	344 * 1032 pixel	320 * 960 pixel	256x768 pixel
Frame Size	2018mm(H)*640mm(W)*45mm(T)	2018mm(H)*640mm(W)*45mm(T)	2018mm(H)*640mm(W)*45mm(T)
Case Material	Aluminum	Aluminum	Aluminum
Weight	40 kg/unit	40 kg/unit	40 kg/unit
Drive mode	1/43 Scan	1/40 Scan	1/32 Scan
Viewing Distance	≥ 1.8 m	≥ 2 M	≥ 2.5 m
Brightness	800-1000 cd/m ²	800-1000 cd/m ²	800-1000 cd/m ²
Viewing Angle	140°(H)/140°(V)	140°(H)/140°(V)	140°(H)/140°(V)
Refresh rate	3840/7680 HZ Optional	3840/7680HZ Optional	3840/7680 HZ Optional
Input voltage	AC 100–230 V	AC 100–230 V	AC 100–230 V
Maximum Power Consumption	450 W/unit	450 W/unit	450 W/unit
Average Power Consumption	135 W/unit	135 W/unit	135 W/unit
Control method:	Syn/Asyn (WiFi/USB/LAN/HDMI)	Syn/Asyn (WiFi/USB/LAN/HDMI)	Syn/Asyn (WiFi/USB/LAN/HDMI)
Splicing method	HDMI automatic splicing	HDMI automatic splicing	HDMI automatic splicing
Temperature Operating (°C)	-40° ~ +75° C	-40° ~ +75° C	-40° ~ +75° C
Working Humidity	10%–95% RH	10%–95% RH	10%–95% RH
IP Rating	IP54 (front), IP43 (rear)	IP54 (front), IP43 (rear)	IP54 (front), IP43 (rear)
Package	Flight case (side opening)	Flight case (side opening)	Flight case (side opening)
Application	Indoor / Semi-Outdoor	Indoor / Semi-Outdoor	Indoor / Semi-Outdoor
Certificate	CE / ROHS / FCC	CE / ROHS / FCC	CE / ROHS / FCC

Case Show





Seamless Design, Limitless Impact

Go seamless.. Go stunning.. Choose Seamless LED Poster.

Elevate your display with Seamless LED Poster.

Make every pixel count — switch to Seamless LED Poster.

OUR CONTACT

We're here to help you!

Official Distributor : Multitrade Asiapac Sdn. Bhd.

Phone:

KL/Selangor : 012-2053198(Ng)/012-3781971(Chan)

Penang : 012-8220097(Desmond)

Johor : 016-7551470(Ray)

Email : sales@niceleds.com

Website : www.niceleds.com